


SERIES ST

KIRTON
WHEREVER WATER IS RECYCLED

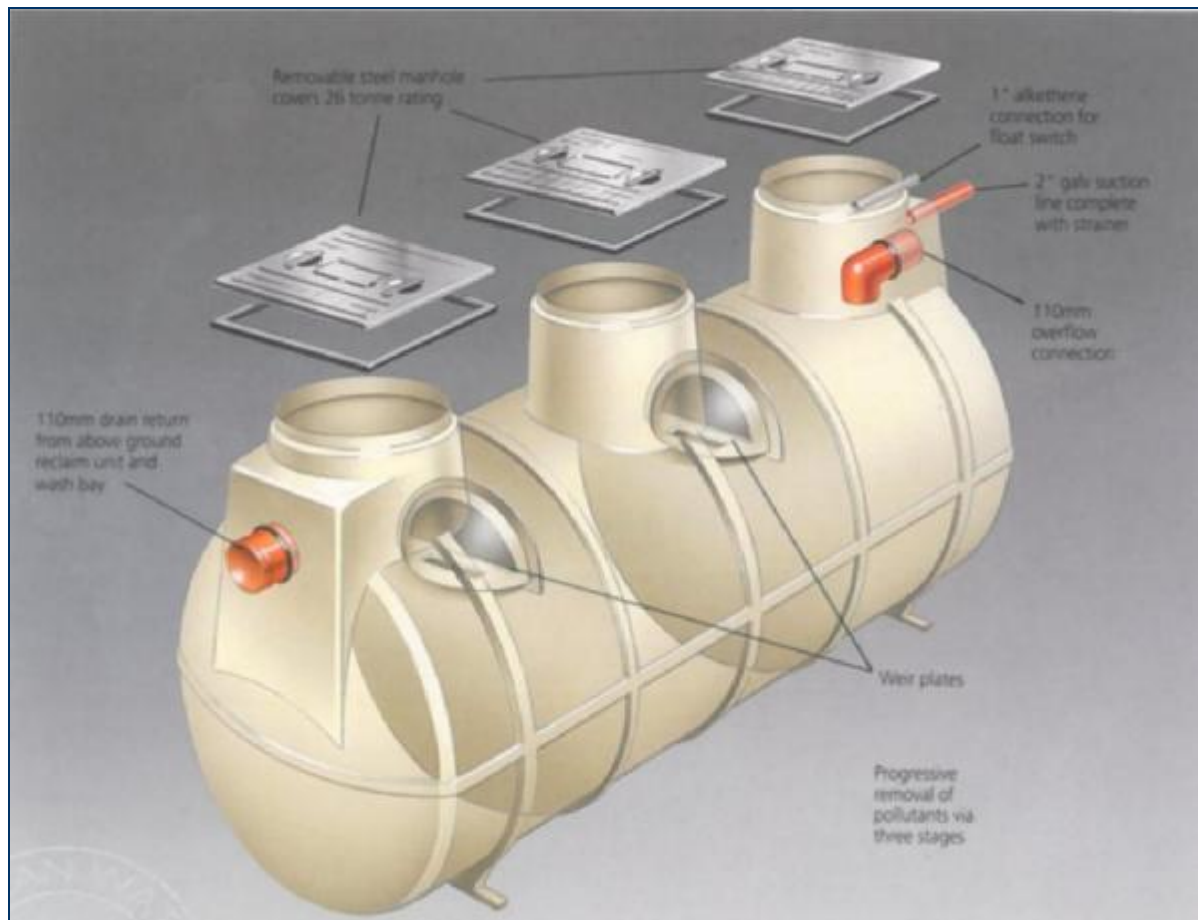

THREE STAGE VEHICLE WASH WATER INTERCEPTOR TANK

- ~ Reduces pollution
- ~ Reduces effluent charges
- ~ Prevents drain blockages
- ~ Free oil removed
- ~ Packaged one piece system including covers for fast, labour saving installation
- ~ Connection of below ground pipework to connections provided, at time of installation, enabling a water recycle system to be fitted at a later date allowing the user to reduce water and effluent costs, or to continue to use the vehicle wash in the event of any water rationing
- ~ Recommended by all leading vehicle wash manufacturers

SERIES ST



The Kirton ST system has been specifically designed for vehicle wash effluents and is extensively used throughout the transport industry.

Model	Dimensions (externally)	Weight (kg)		Water Capacity (litres)	Usage
		Empty	Full		
ST2500	2879 x 1300 x 1620	218	2718	2500	Max 35g/m
ST3250	3620 x 1300 x 1610	244	3494	3250	Max 35g/m
ST6000	3300 x 1900 x 2185	468	6468	6000	Max 75g/m

The interceptor tanks are made of durable corrosion proof glass reinforced polyester, which combines light weight with outstanding strength. If required for an above ground installation a suitable unit can also be supplied.

Also available:

- ~ Kirton OS range of titled plate oil separators
- ~ Kirton HC and GHD range of vehicle wash water recycling systems

SERIES ST



Model	Dimensions (externally)	Weight (kg)		Water Capacity (litres)	Usage
		Empty	Full		
ST2500	2879 x 1300 x 1620	218	2718	2500	Max 35g/m
ST3250	3620 x 1300 x 1610	244	3494	3250	Max 35g/m
ST6000	3300 x 1900 x 2185	Empty	Full	6000	Max 75g/m
		468	6468		